

Cable design

| | |
|---------------------------|---|
| Center conductor | silver-plated solid copperweld wire |
| Dielectric | PTFE |
| Shield | silver-plated copper tape silver-plated copper braid |
| Jacket | FEP |
| Center conductor diameter | Ø 0,51 mm |
| Dielectric diameter | Ø 1,63 mm |
| Outer shield diameter | Ø 2,18 mm (0.086 inch) |
| Out-side diameter | Ø 2,64 mm |
| Weight | 0,021 kg/m |

Electrical data


| | |
|-------------------------|---------------------|
| Impedance | 50 ohms |
| Capacitance | 96 pF/m |
| Frequency range | DC – 18 GHz. |
| Insertion loss | see graph |
| Velocity of propagation | 70 % |
| Shielding effectiveness | < -100 dB/m typical |

Mechanical and environmental data


| | |
|-------------------|----------------------------------|
| Temperature range | -55 to +165°C |
| Salt spray | 96 hours |
| Bending radius | 6 mm (static) 25 mm (dynamic) |

**High Performance
ultra low loss coaxial cable**

HF 086 UFP

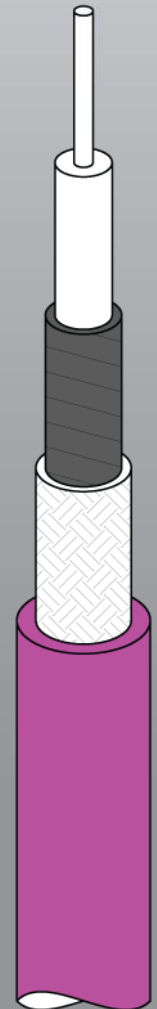

DC – 18 Ghz

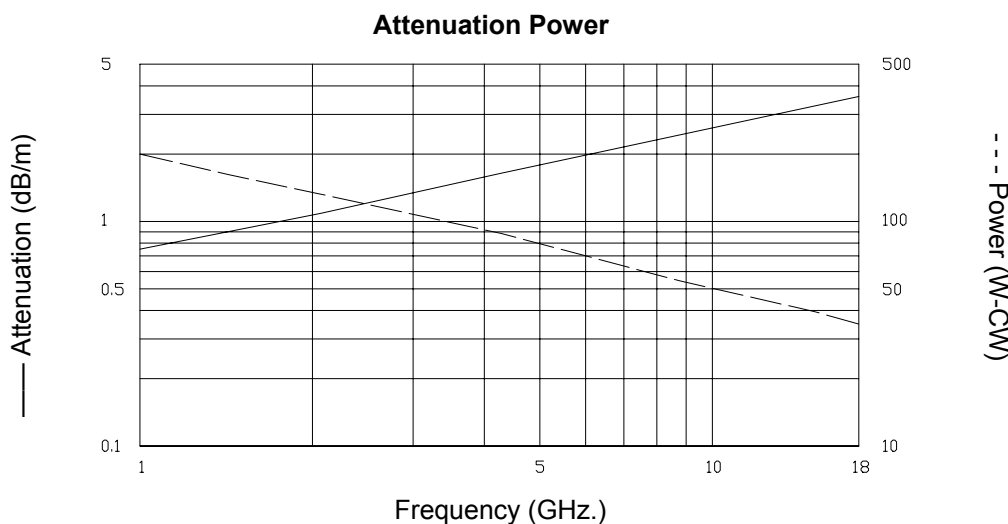

Please consult us for the required connectors.
We can supply cable harnesses made to your requirements.
Also available: High Dynamic Coaxial Cable.

**Gigalink Microwave
Connection Engineering B.V.**

Albert Plesmanweg 35 E
3088 GA Rotterdam
The Netherlands

Tel: + 31 (0) 10 789 11 22
Fax: +31 (0) 10 789 11 44
E-mail: info@gigalink-mce.com