

Cable design

Center conductor	silver-plated flexible copper wire
Dielectric	ePTFE wrapped
Shield	silver-plated tape silver-plated braid FEP
Jacket	FEP
Out-side diameter	Ø 5,05 mm
Weight	0,063 kg/m

Electrical data


Impedance	50 ohms
Capacitance	80 pF/m
Frequency range	DC – 26,5 GHz.
V.S.W.R.	<1,30
Insertion loss	see graph
Velocity of propagation	80 %
Shielding effectiveness	< -100 dB/m typical

Mechanical and environmental data

Temperature range	-65 to +165°C
Salt spray	96 hours
Bending radius	25 mm (static) 50 mm (dynamic)
Flex life	>50.000


**High Performance
ultra low loss coaxial cable**

A 52 FP

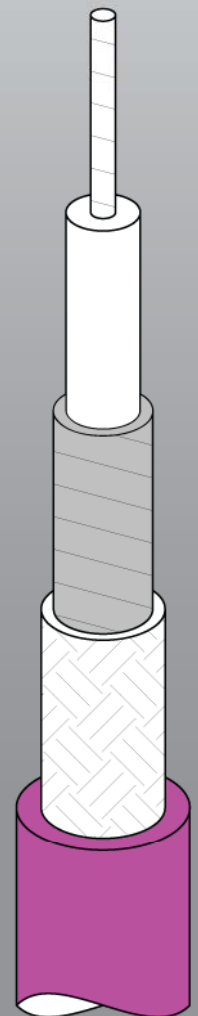

DC – 26,5 Ghz

Attenuation Power

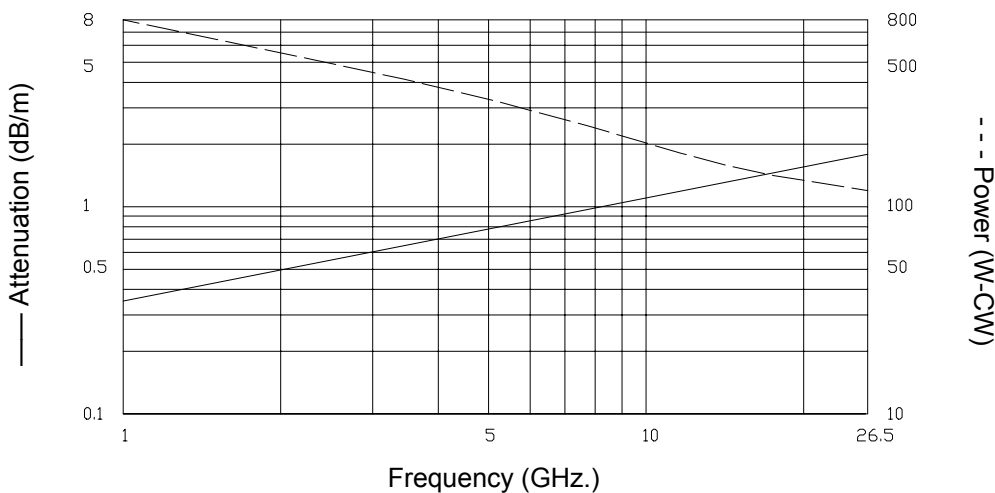

Please consult us for the required connectors.
We can supply cable harnesses made to your requirements.
Also available: High Dynamic Coaxial Cable.

**Gigalink Microwave
Connection Engineering B.V.**

Albert Plesmanweg 35 E
3088 GA Rotterdam
The Netherlands

Tel: + 31 (0) 10 789 11 22
Fax: +31 (0) 10 789 11 44
E-mail: info@gigalink-mce.com