

Cable design

Center conductor	silver-plated flexible copper wire
Dielectric	ePTFE wrapped
Shield	silver-plated tape
Inner jacket	ePTFE wrapped
Shield	silver-plated copper braid
Jacket	ePTFE wrapped
Out-side diameter	Ø 6,15mm
Weight	0,065 kg/m

Electrical data


Impedance	50 ohms
Capacitance	81 pF/m
Frequency range	DC – 26,5 GHz.
V.S.W.R.	<1,35
Insertion loss	see graph
Velocity of propagation	82 %
Shielding effectiveness	< -100 dB/m typical

Mechanical and environmental data

Temperature range	-65 to +165°C
Salt spray	96 hours
Bending radius	30 mm (static) 45 mm (dynamic)
Flex life	>5.000.000


**Super Dynamic
ultra low loss coaxial cable**

A 52 TFE

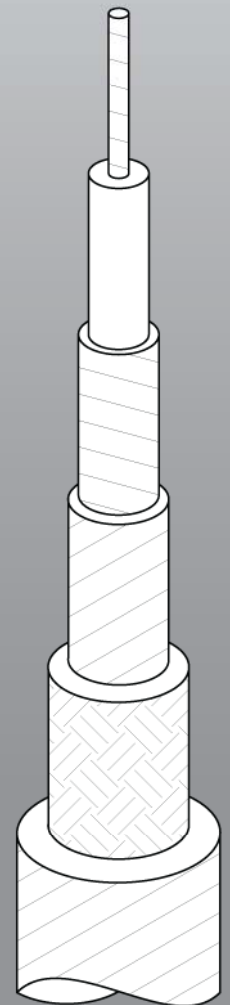

DC – 26,5 Ghz

Attenuation Power

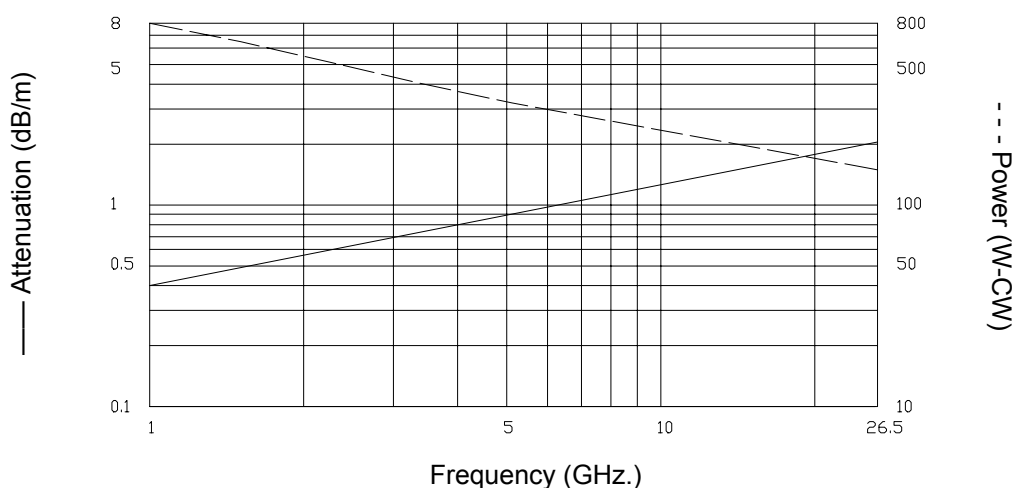

Please consult us for the required connectors.
We can supply cable harnesses made to your requirements.
Also available: High Dynamic Coaxial Cable.

**Gigalink Microwave
Connection Engineering B.V.**

Albert Plesmanweg 35 E
3088 GA Rotterdam
The Netherlands

Tel: + 31 (0) 10 789 11 22
Fax: +31 (0) 10 789 11 44
E-mail: info@gigalink-mce.com