

Cable design

Center conductor	silver-plated solid copper wire
Dielectric	ePTFE wrapped
Shield	silver-plated tape silver-plated copper
First Innerjacket	FEP
Reinforcement	Kapton® tape
Second Innerjacket	Polyurethane
Reinforcement	Kapton® tape
Jacket	Polyurethane
Out-side diameter	Ø 13,2 mm
Weight	0,23 kg/m

Electrical data


Impedance	50 ohms
Capacitance	80 pF/m
Frequency range	DC – 26,5 GHz.
V.S.W.R.	<1,30
Insertion loss	see graph
Velocity of propagation	84 %
Shielding effectiveness	< -100 dB/m typical

Mechanical and environmental data


Temperature range	-65 to +100°C
Bending radius	40 mm (static) 90 mm (dynamic)
Flex life	>1.000.

**High Performance
ultra low loss coaxial cable**

A 60 PPP

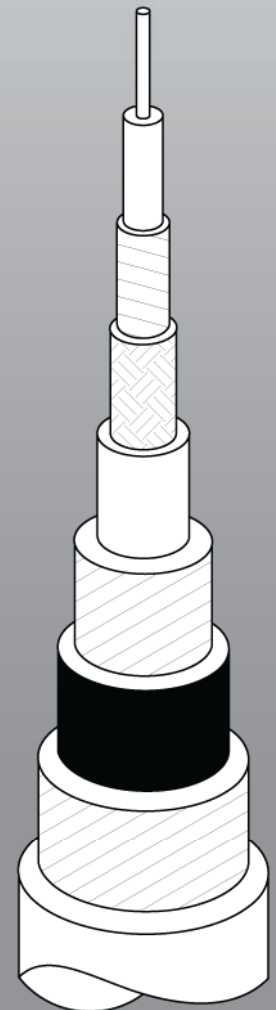

DC – 26,5 Ghz

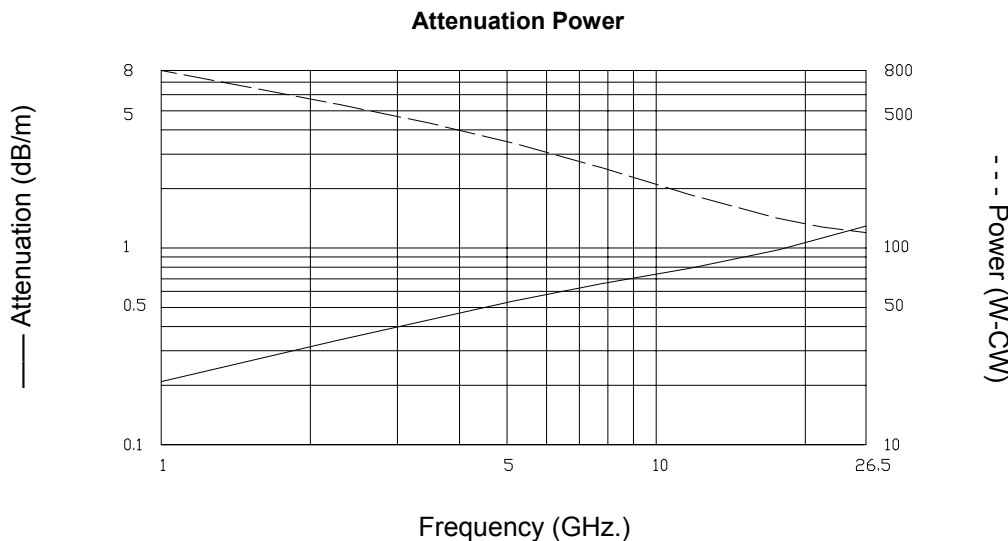

Please consult us for the required connectors.
We can supply cable harnesses made to your requirements.
Also available: High Dynamic Coaxial Cable.

**Gigalink Microwave
Connection Engineering B.V.**

Albert Plesmanweg 35 E
3088 GA Rotterdam
The Netherlands

Tel: + 31 (0) 10 789 11 22
Fax: +31 (0) 10 789 11 44
E-mail: info@gigalink-mce.com