

Military part number M17/133- 00002 / 00008

Semi Rigid hand formable

Cable design

Center conductor	silver-plated copper
Dielectric	extruded PTFE
Outer conductor	seamless copper tubing
Center conductor diameter	Ø 0,51 mm
Dielectric diameter	Ø 1,68 mm
Out-side diameter	Ø 2,20 mm (0.086 inch)
Weight	0,023 kg/m


EZ 7011
M17/.086

Electrical data

Impedance	50 ohms
Frequency range	DC – 40 GHz.
Insertion loss	see graph
Shielding effectiveness	< -120 dB/m typical
Dielectric strength 60 Hz.	5,0 kVrms
Corona extinction	>1,5 kVrms


Mechanical and environmental data

Temperature range	-55 to +125°C
Bending radius	1,3 mm (proper tooling)

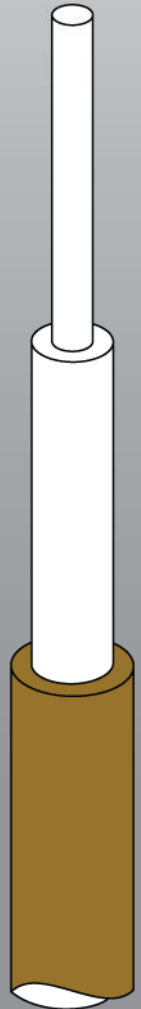

DC – 40 Ghz

Attenuation Power

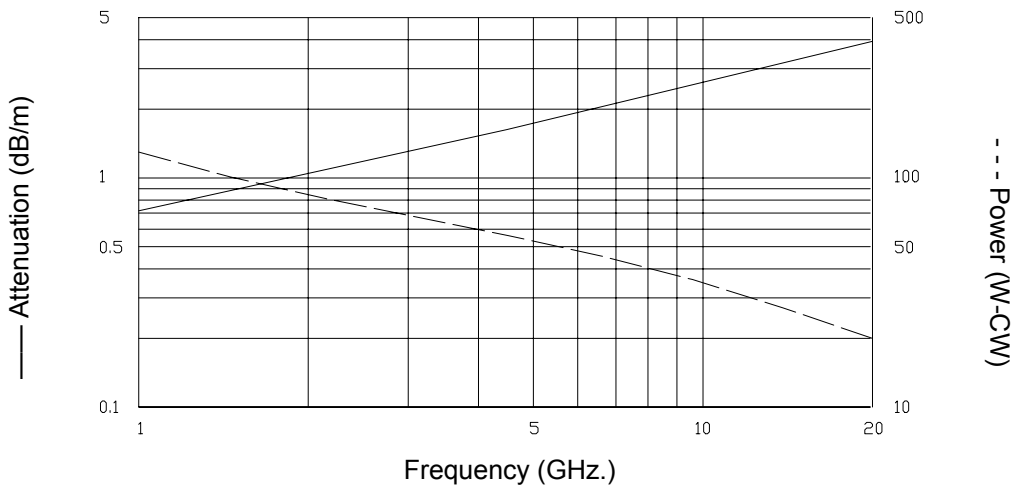

Please consult us for the required connectors.
We can supply cable harnesses made to your requirements.
Also available: High Dynamic Coaxial Cable.

**Gigalink Microwave
Connection Engineering B.V.**

Albert Plesmanweg 35 E
3088 GA Rotterdam
The Netherlands

Tel: + 31 (0) 10 789 11 22
Fax: +31 (0) 10 789 11 44
E-mail: info@gigalink-mce.com