

Cable design

Center conductor	copper covered aluminium wire
Dielectric	ePTFE wrapped
Shield	silver-plated copper tape silver-plated braid
Jacket	FEP
Out-side diameter	Ø 16,3 mm
Weight	0,425 kg/m

Electrical data


Impedance	50 ohms
Capacitance	80 pF/m
Frequency range	DC – 8 GHz.
V.S.W.R.	<1,3
Insertion loss	see graph
Velocity of propagation	80 %
Shielding effectiveness	< -100 dB/m typical

Mechanical and environmental data


Temperature range	-65 to +165°C
Salt spray	96 hours
Bending radius	180 mm (static) 250 mm (dynamic)

**High Performance
ultra low loss coaxial cable**

A 150 UFP

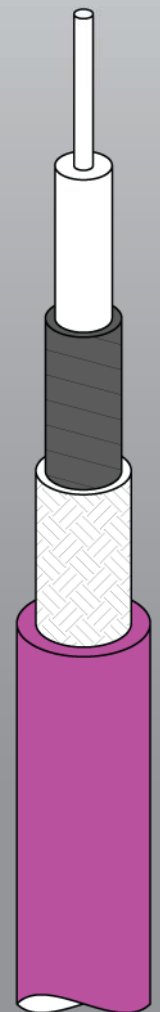

DC – 8 GHz

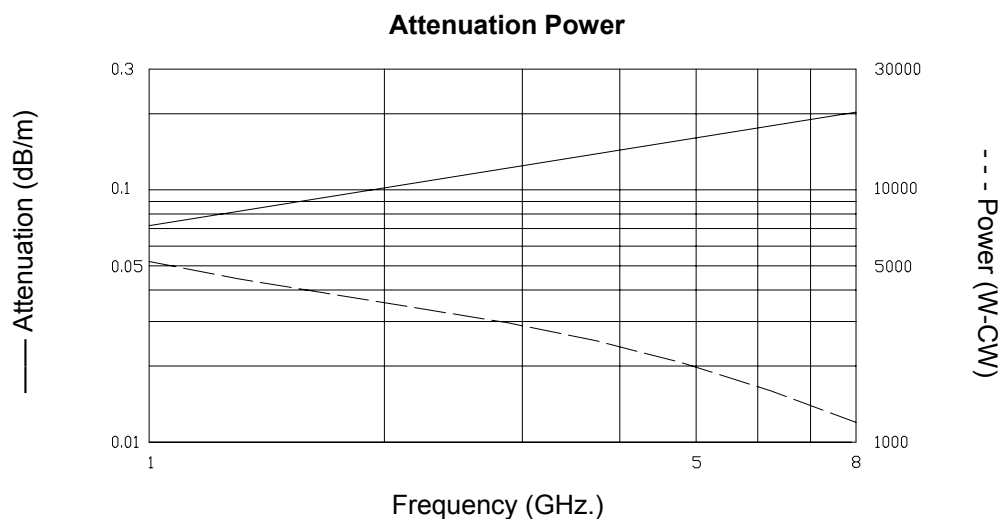

Please consult us for the required connectors.
We can supply cable harnesses made to your requirements.
Also available: High Dynamic Coaxial Cable.

**Gigalink Microwave
Connection Engineering B.V.**

Albert Plesmanweg 35 E
3088 GA Rotterdam
The Netherlands

Tel: + 31 (0) 10 789 11 22
Fax: +31 (0) 10 789 11 44
E-mail: info@gigalink-mce.com